


212 型四氟波纹管管用机械密封

技术参数

| | |
|---------|---|
| 介质压力 | Pressure of Medium: $\leq 0.6\text{MPa}$ |
| 介质温度 | Temperature of Medium: $-40^{\circ}\text{C}-150^{\circ}\text{C}$ |
| 线速度 | Line Speed: $\leq 500\text{rpm}$ |
| 介质: | 硫酸、硝酸、盐酸、有机酸等。各种强腐蚀性介质 (无悬浮颗粒) |
| Medium: | H_2SO_4 , HNO_3 , HCl , organic acid, All kinds of strong corrosive mediums (without suspension grains) |

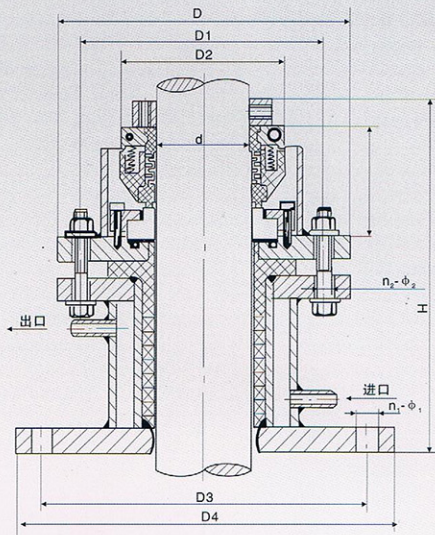

69标安装尺寸

69 INSTALLATION SIZE

| 公称尺寸 Nominal Dimensions | d | D | D1 | D2 | D3 | D4 | H1 | H | n1-φA | n2-φB |
|-------------------------------|------|-----|-----|-----|-----|-----|----|-----|--------|--------|
| 公差 Tolerance | +1.5 | | | | | | | | | |
| -0.5 | | | | | | | | | | |
| 代号 Code name | | | | | | | | | | |
| 42 | 42 | 170 | 140 | 90 | 140 | 170 | 66 | 180 | 6-φ13 | 6-φ16 |
| 50 | 50 | 200 | 170 | 100 | 170 | 200 | 66 | 180 | 8-φ13 | 8-φ16 |
| 60 | 60 | 200 | 170 | 110 | 190 | 220 | 66 | 180 | 8-φ13 | 10-φ16 |
| 70 | 70 | 220 | 190 | 120 | 250 | 280 | 66 | 180 | 10-φ13 | 16-φ16 |
| 76 | 76 | 220 | 190 | 130 | 250 | 280 | 66 | 180 | 10-φ13 | 16-φ16 |
| 80 | 80 | 220 | 190 | 130 | 250 | 280 | 66 | 180 | 10-φ13 | 16-φ16 |
| 89 | 89 | 220 | 190 | 140 | 250 | 280 | 66 | 180 | 10-φ13 | 16-φ16 |
| 95 | 95 | 230 | 200 | 150 | 300 | 330 | 66 | 180 | 6-φ13 | 20-φ16 |

79标安装尺寸

79 INSTALLATION SIZE

| 公称尺寸 Nominal Dimensions | d | D | D1 | D2 | D3 | D4 | H1 | H | n1-φA | n2-φB |
|-------------------------------|------|-----|-----|-----|-----|-----|----|-----|--------|-------|
| 公差 Tolerance | +1.5 | | | | | | | | | |
| -0.5 | | | | | | | | | | |
| 代号 Code name | | | | | | | | | | |
| 40 | 40 | 170 | 140 | 90 | 130 | 160 | 66 | 180 | 6-φ13 | 4-φ14 |
| 50 | 50 | 200 | 170 | 100 | 150 | 185 | 66 | 180 | 8-φ13 | 4-φ18 |
| 65 | 65 | 220 | 190 | 115 | 170 | 205 | 66 | 180 | 10-φ13 | 4-φ18 |
| 80 | 80 | 220 | 190 | 130 | 200 | 235 | 66 | 180 | 10-φ13 | 8-φ18 |
| 95 | 95 | 230 | 200 | 150 | 200 | 235 | 66 | 180 | 6-φ13 | 8-φ18 |
| 102 | 102 | 230 | 200 | 150 | 255 | 290 | 66 | 180 | 10-φ13 | 8-φ18 |