
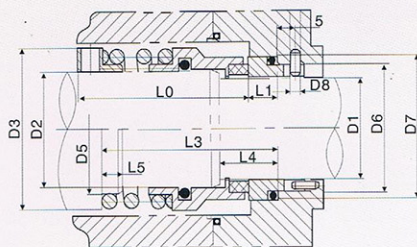


# 1523 型机械密封

## 技术参数

平衡型 Balanced  
 单端面密封 Single seal  
 旋转方向固定 Dependent on Direction of Rotation

介质温度 Temperature of Medium: -20°C-150°C  
 介质压力 Pressure of Medium: 0-2MPa  
 线速度 Line Speed: ≤15m/sec

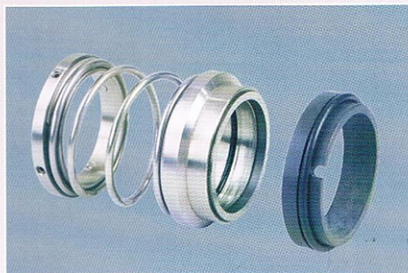

尺寸	D1	D2	D3	D5	D6	D7	D8	L0	L1	L3	L4	L5
规格		h6		h10	H11	H8				±0.5	±0.5	
1523-18	18	22	36	26	27	33	3	45	10	49.5	20	5.5
1523-20	20	24	38	28	29	35	3	50	10	53.5	20	5.5
1523-22	22	26	40	30	31	37	3	50	10	53.5	20	6
1523-24	24	28	42	32	33	39	3	50	10	53.5	20	6
1523-25	25	30	44	34	34	40	3	50	10	53.5	20	6
1523-28	28	33	47	37.5	37	43	3	55	10	57.5	20	6.5
1523-30	30	35	49	39.5	39	45	3	55	10	57.5	20	7
1523-32	32	38	54	42.5	42	48	3	55	10	57.5	20	7
1523-33	33	38	54	42.5	42	48	3	55	10	57.5	20	7
1523-35	35	40	56	45	44	50	3	55	10	57.5	20	7
1523-38	38	43	59	48	49	56	4	64	11	67.5	23	7.5
1523-40	40	45	61	50	51	58	4	64	11	67.5	23	7.5
1523-43	43	48	64	53	54	61	4	64	11	67.5	23	7.5
1523-45	45	50	66	55	56	63	4	64	11	67.5	23	7.5
1523-48	48	53	69	58	59	66	4	74	11	77.5	23	9
1523-50	50	55	71	60	62	70	4	72	13	77.5	25	9
1523-53	53	58	78	63	65	73	4	72	13	77.5	25	9
1523-55	55	60	80	66	67	75	4	72	13	77.5	25	9
1523-58	58	63	83	69	70	78	4	72	13	77.5	25	9
1523-60	60	65	85	71	72	80	4	82	13	85.5	25	11
1523-63	63	68	88	74	75	83	4	82	13	85.5	25	11
1523-65	65	70	90	76	77	85	4	82	13	85.5	25	11
1523-68	68	73	93	79	81	90	4	79.7	15.3	85.5	28	11
1523-70	70	75	99	81	83	92	4	79.7	15.3	93.5	28	11
1523-75	75	80	104	86	88	97	4	89.7	15.3	93.5	28	12
1523-80	80	85	109	91	95	105	4	89.3	15.7	93.5	28	12
1523-85	85	90	114	96	100	110	4	89.3	15.7	93.5	28	13
1523-90	90	95	119	101	105	115	4	89.3	15.7	93.5	28	13
1523-95	95	100	124	106	110	120	4	89.3	15.7	93.5	28	13
1523-100	100	105	129	111	115	125	4	89.3	15.7	93.5	28	13