


WB2、152A 型机械密封

技术参数

单端面密封	Single Seal
任意旋向	Independent on Direction of Rotation
聚四氟乙烯波纹管	PTFE-Bellows
介质温度	Temperature of Medium: -0°C-80°C
介质压力	Pressure of Medium: 0-0.5MPa
线速度	Line Speed: $\leq 15\text{m/sec}$

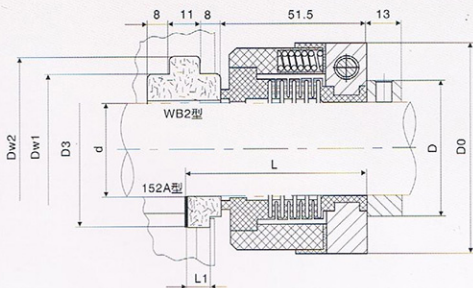

尺寸 规格	D	D0	D3	L	L1	d	型号规格	Dw1	Dw2
			H8			h6		A10	H8
152A-25	41	69	48	63.5	8	25	WB2-25	47	60
152A-30	46	74	53	63.5	8	30	WB2-30	52	66
152A-35	51	79	58	63.5	8	35	WB2-35	57	70
152A-40	56	84	63	63.5	8	40	WB2-40	62	76
152A-45	61	89	68	65.5	9	45	WB2-45	67	82
152A-50	66	96	73	65.5	9	50	WB2-50	72	86
152A-55	71	101	78	65.5	9	55	WB2-55	78	94
152A-60	80	106	83	65.5	9	60	WB2-60	86	102
152A-65	85	111	88	65.5	9	65			
152A-70	90	123	93	65.5	9	70			