

105 型机械密封



技术参数

介质压力	0-0.7MPa	Pressure of Medium:	0-0.7MPa
介质温度	-45-200℃	Temperature of Medium:	-45℃-200℃
转速	3000转/分	Speed:	3000rpm
介质	弱酸、弱碱、油水		
Medium	Weak acid, Weak alkali and oil water		

多弹簧、非平衡型

适用于水泵、化工泵和潜水泵等类似旋转机械

Multi-spring and non-equilibrium type. Applicable for water pump, chemical pump and diving pump and similar rotary machines

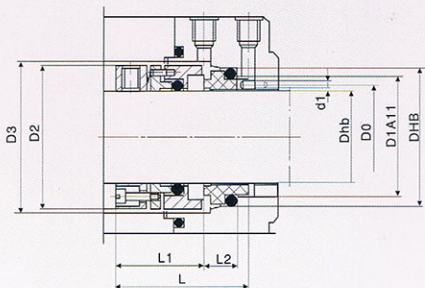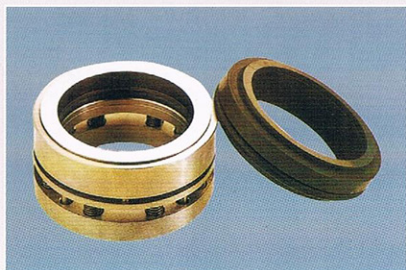

d	d1	D	D0	D1	D2	D3	L	L1	L2
35	3	55	40	45	57	60	57	38	14
40	3	60	45	50	62	65	57	38	14
45	3	65	50	55	67	70	58	39	14
50	3	70	55	60	72	75	58	39	14
55	3	75	60	65	77	80	58	39	14
60	3	80	65	70	82	85	58	39	14
65	3	90	73	80	91	95	66	44	17
70	3	97	78	85	96	100	69	44	19
75	3	102	83	90	101	105	69	44	19
80	3	107	88	95	106	110	69	44	19
85	3	112	93	100	111	115	71	46	19
90	3	117	98	105	116	120	71	46	19
95	3	122	103	110	121	125	71	46	19
100	3	127	108	115	126	130	71	46	19
110	3	142	120	130	140	145	78	51	21
120	3	152	130	140	150	155	78	51	21